


Medvaržčiai GKP plokštėms (prie metalo)

PH bugle head drywall screws (twinfast fine thread)

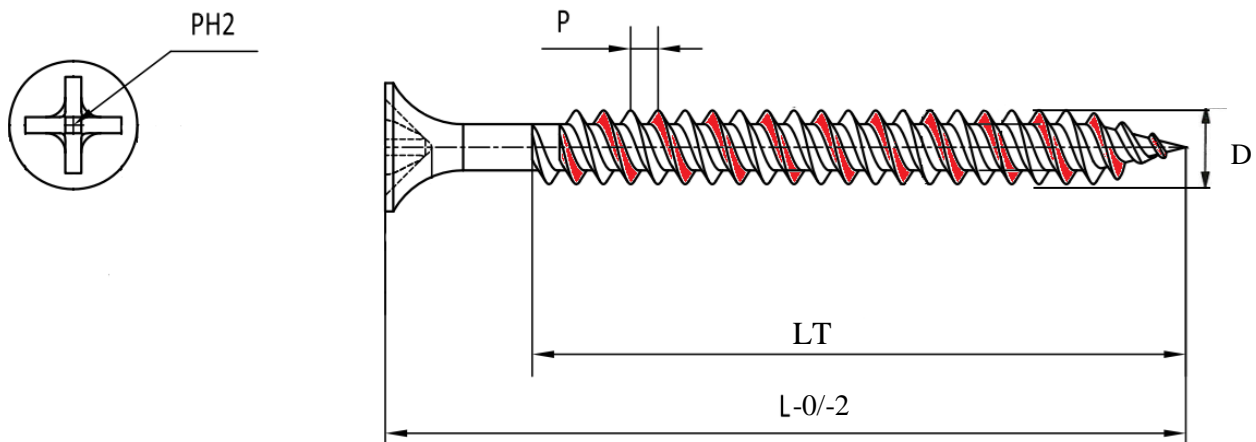

Matmenys/Dimensions mm

D	ø 3,5	ø 3,8	ø 4,2	ø 4,8
PH	2	2	2	2
P (± 10%)	2,80	3,20	3,40	4,20

L	LT	LT	LT	LT
25	p.s			
32	p.s			
35	p.s			
41	p.s			
45	p.s			
51	45			
55	45			
64		45		
70			45	
76			45	
90				45
102				45
127				45
152				45

p.s - pilnu sriegiu,
 D – diametras mm,
 PH – įsukimo tipas,
 P – sriegio žingsnis mm,
 L – ilgis mm,
 LT – srieginės dalies ilgis mm,

p.s. - full thread
 D – diameter mm
 PH – drive type
 P – pitch mm
 L – length mm
 LT – thread part length mm