


Ankeriai su žiedu

Wedge anchors

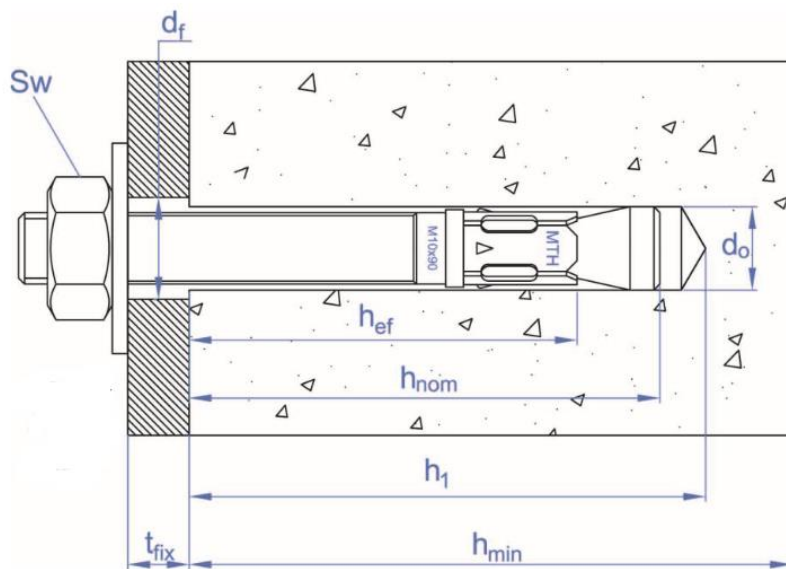

Matmenys/Dimensions

Matmenys	Drill bit diameter	Fixed clearance hole diameter	Torque	Minimum allowable spacing	Minimum allowable edge distance	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (concrete cone)	Critical spacing (splitting)	Critical edge distance (splitting)
	Gražtelio diametras	Gręžimo gylis į tvirtinamą detalę	Sukimo momentas	Mažiausias leistinas atstumas	Mažiausias leistinas atstumas nuo krašto	Minimalus pagrindo storis	Gręžimo skylės gylis	Montavimo gylis	Efektyvus tvirtinimo gylis	Maksimalus tvirtinamos medžiagos storis	Kritinis atstumas (betono kūgis)	Kritinis atstumas nuo krašto	Kritinis atstumas (skylant)	Kritinis atstumas nuo krašto (skylant)
	d ₀ [mm]	d _f [mm]	T _{inst} [Nm]	S _{min} [mm]	C _{min} [mm]	H _{min} [mm]	H ₁ [mm]	H _{nom} [mm]	H _{ef} [mm]	T _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]
6x45	6	7	7	50	50	-	-	-	-	-	-	-	-	-
6x60						100	55	49.5	40	2	120	60	160	80
6x80										22				
6x120										62				
6x140										82				
6x160										102				
6x170										112				
6x180										122				
8x50	8	9	20	65	65	-	-	-	-	-	-	-	-	-
8x75						100	65	59,5	48	5	144	72	192	96
8x90										20				
8x115										45				
10x70	10	12	35	70	70	-	-	-	-	-	-	-	-	-
10x90						110	75	65,5	55	10	165	83	220	110
10x120										40				
10x150										70				

12x75	12	14	60	85	85	-	-	-	-	-	-	-	-	-
12x90						-	-	-	-	-	-	-	-	-
12x110						130	85	77	65	18	195	98	260	130
12x140										48				
16x90	16	18	120	110	110	-	-	-	-	-	-	-	-	-
16x145						168	110	103,5	84	23	252	126	336	168
16x170										48				
20x120						-	-	-	-	-	-	-	-	-
20x170	20	22	240	135	135	206	135	125	103	23	309	155	412	200
20x220										73				