


**Varžtai įleidžiama galvele,
vidiniu šešiakampiu**

**pagal DIN 7991
acc. to DIN 7991**

Hexagon socket countersunk head screws

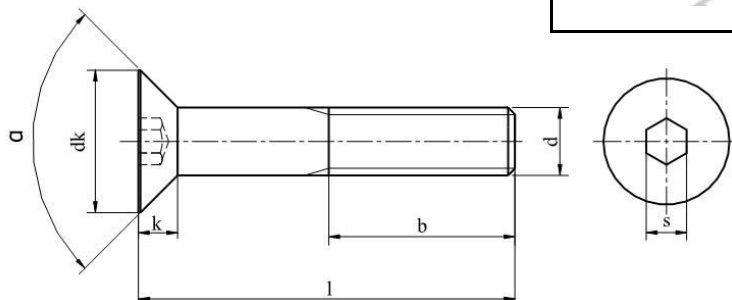

Matmenys

Dimensions

d		M3	M4	M5	M6	M8	M10	M12	(M14)	M16	(M18)
P		0,5	0,7	0,8	1	1,25	1,5	1,75	2	2	2,5
b _{min}	l≤125	12	14	16	18	22	26	30	34	38	42
	125<l ≤200	-	-	-	24	28	32	36	40	44	48
	l>200	-	-	-	-	-	45	49	53	57	61
d _{k nom}		6	8	10	12	16	20	24	27	30	33
k _{max}		1,7	2,3	2,8	3,3	4,4	5,5	6,5	7	7,5	8
s _{nom}		2	2,5	3	4	5	6	8	10	10	12
α		90°	90°	90°	90°	90°	90°	90°	90°	90°	90°

d		M20	(M22)	M24
p		2,5	2,5	3
b_{min}	$l \leq 125$	46	50	54
	$125 < l \leq 200$	52	56	60
	$l > 200$	65	69	73
d_k^{nom}		36	36	39
k^{max}		8,5	13,1	14
s^{nom}		12	14	14
α		90°	60°	60°

() – nerekomenduojami matmenys

() – not recommended dimensions