


Plytsraigčiai įleidžiama TX galvele

Torx flat head concrete screws, hi-low thread

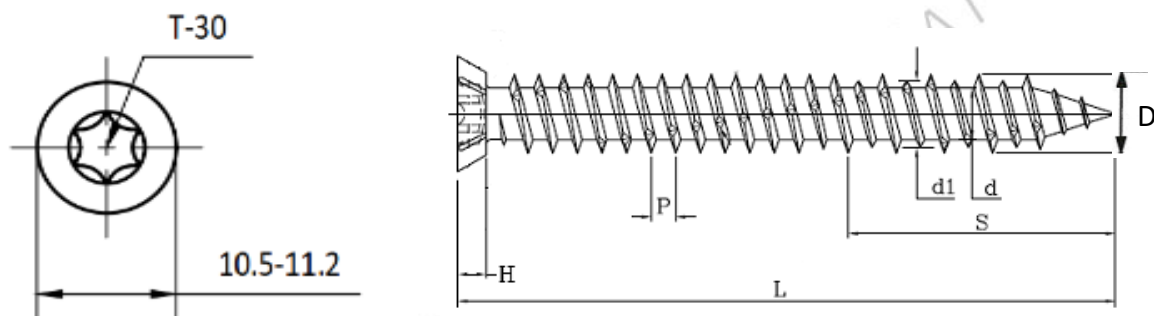

Matmenys/Dimensions, mm

D	d	d _{1 ref}	P	H	S
ø 7,5	5,05-5,20	6,50	2,6	2,75	30 ± 3.00

L	L
52	52 ± 1.00
72	72 ± 1.00
92	92 ± 1.00
112	112 ± 2.00
132	132 ± 2.00
152	152 ± 2.00
182	182 ± 2.00
202	202 ± 2.00
212	212 ± 2.00
302	302 ± 2.00

D – diametras mm,

d – šerdies diametras mm,

d1 – žemo sriegio diametras mm,

P – sriegio žingsnis mm,

H – galvutės aukštis mm,

S – aukšto – žemo sriegio ilgis mm,

D – diameter mm

d – core diameter mm

d1 – low thread diameter mm

P – pitch mm

H – head's height mm

S – high – low thread length mm