

**Struktūriniai varžtai šešiakampe galvele
HV, karštai cinkuoti**


**High-strength structural bolting
assemblies for preloading: System HV**

pagal EN 14399-4

acc. to EN 14399-4

DIN 6914

PN 82343

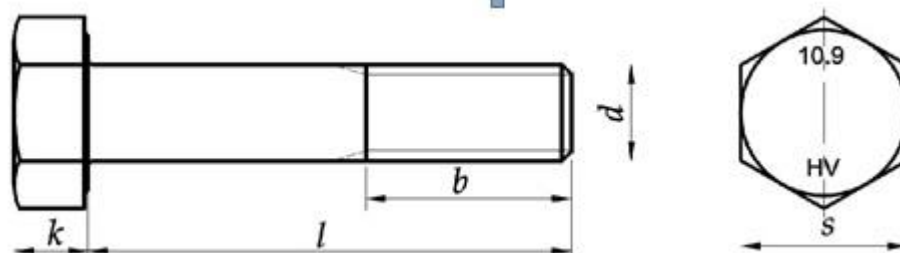

Matmenys*

Dimensions*

<i>d</i>		M12	M16	M20	M22	M24	M27	M30	M36
<i>P</i>		1,75	2	2,5	2,5	3	3	3,5	4
<i>b</i>		23	28	33	34	39	41	44	52
<i>k</i>	<i>nom.</i>	8	10	13	14	15	17	19	23
	<i>min.</i>	7,55	9,25	12,1	13,1	14,1	16,1	17,95	21,95
	<i>max</i>	8,45	10,75	13,9	14,9	15,9	17,9	20,05	24,05
<i>s</i>	<i>max</i>	22	27	32	36	41	46	50	60
	<i>min.</i>	21,16	26,16	31	35	40	45	49	58.8

P –sriegio žingsnis

* matmenys prieš karštą cinkavimą

P- thread pitch

* - for hot dip galvanized bolts the above dimensions apply prior to galvanizing.