


Varžtai žema cilindrine galvele,
vidiniu šešiakampiu

pagal DIN 7984

acc. to ISO 7984

Hexagon socket head cap screws with low head

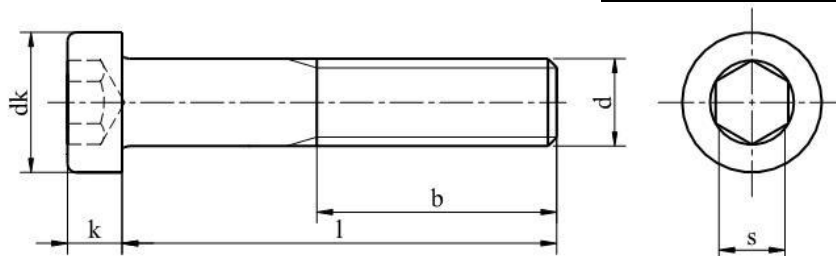

Matmenys

Dimensions

d		M3	M4	M5	M6	M8	M10	M12	(M14)	M16	(M18)
p		0,5	0,7	0,8	1	1,25	1,5	1,75	2	2	2,5
bmin	$l \leq 125$	12	14	16	18	22	26	30	34	38	42
	$125 < l \leq 200$	-	-	-	-	28	32	36	40	44	48
	$l > 200$	-	-	-	-	-	-	-	-	57	61
dk nom		5,5	7	8,5	10	13	16	18	21	24	27
k max		2	2,8	3,5	4	5	6	7	8	9	10
snom		2	2,5	3	4	5	7	8	10	12	12

d		M20	(M22)	M24
p		2,5	2,5	3
bmin	l≤125	46	50	54
	125<l ≤200	52	56	60
	l>200	65	69	73
dk nom		30	33	36
k max		11	12	13
snom		14	14	17

() – nerekomenduojami
matmenys
P – sriegio žingsnis

() – not recommended dimensions
P – pitch thread