


Medvaržčiai TX įsukimu, daliniu sriegiu WS9135

Chipboard screws countersunk head with TX and part thread WS9135

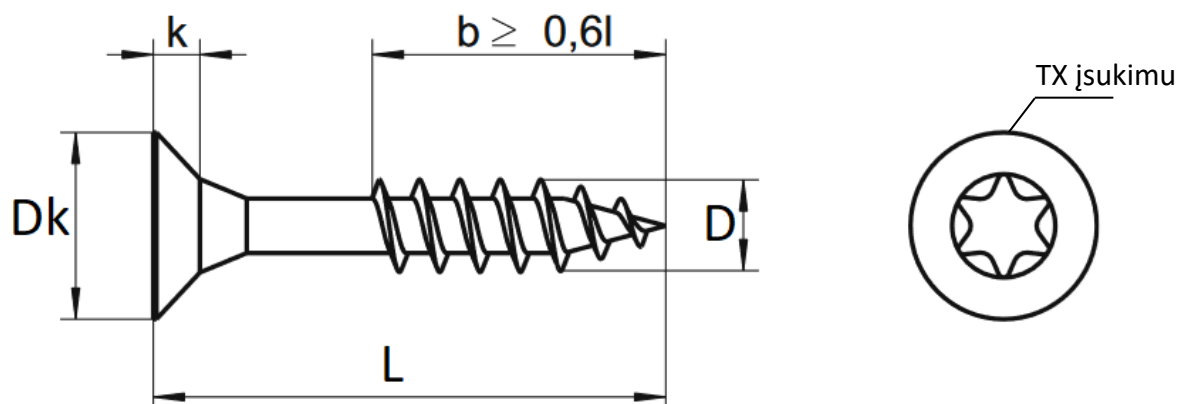

Matmenys/Dimensions

D	3	3.5	4	4.5	5	6	8
Dk	6	7	8	9	10	12	14
k	1.50	1.75	2.00	2.25	2.50	3.00	4.00
Įsukimas	TX10	TX10	TX20	TX20	TX25	TX25	TX40

L	b						
25	15mm	15mm	15mm	15mm	15mm		
30	18mm	18mm	18mm	18mm	18mm		
35	21mm	21mm	21mm	21mm	21mm		
40	24mm	24mm	24mm	24mm	24mm	24mm	24mm
45		27mm	27mm	27mm	27mm	27mm	27mm
50		30mm	30mm	30mm	30mm	30mm	30mm
60		36mm	36mm	36mm	36mm	36mm	36mm
70		42mm	42mm	42mm	42mm	42mm	42mm
80				48mm	48mm	48mm	48mm
90				54mm	54mm	54mm	54mm
100				60mm	60mm	60mm	60mm
110						66mm	66mm
120						72mm	72mm
130						78mm	78mm
140						84mm	84mm
150						90mm	90mm
160						96mm	96mm
180						108mm	108mm
200						120mm	120mm
220						132mm	132mm
240						144mm	144mm

D – diametras mm,
 Dk – galvutės diametras mm,
 k – galvutės aukštis mm,
 L – visas ilgis mm,
 b – srieginės dalies ilgis mm,

D – diameter mm
 Dk – head diameter mm
 k – head height mm
 L – length mm
 b – threaded part length mm