


Varžtai įleidžiama galvele, PH įsukimu

pagal DIN 965
ACC. TO DIN 965
ISO 7046
PN 82208

CROSS RECESSED COUNTERSUNK (FLAT) HEAD SCREWS

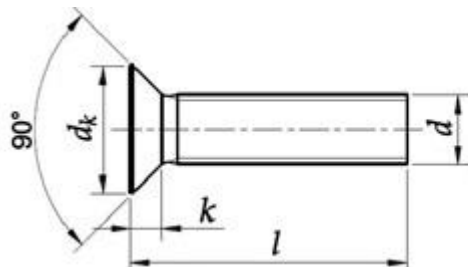

Matmenys

Dimensions

D	M1,6	M2	M2,5	M3	(M3,5)	M4	M5	M6	M8	M10	
P	0,35	0,4	0,45	0,5	0,6	0,7	0,8	1	1,25	1,5	
D _k	MAX	3	3,8	4,7	5,6	6,5	7,5	9,2	11	14,5	18
	MIN	2,75	3,5	4,4	5,3	6,14	7,14	8,84	10,57	14,07	17,57
K _{MAX}	0,96	1,2	1,5	1,65	1,93	2,2	2,5	3	4	5	
H	0	1	1	1	2	2	2	3	4	4	

H – PH antgalio dydis

() – nerekomenduojami matmenys

P – sriegio žingsnis

H – Philips cross recess

() – not recommended dimensions

P – thread pitch