


Konstrukciniai medvaržčiai su įpjova, siaura įleidžiama galvele

CSK Head screws, 6 Nibs, U-thread, coarse- thread, type 17 slot

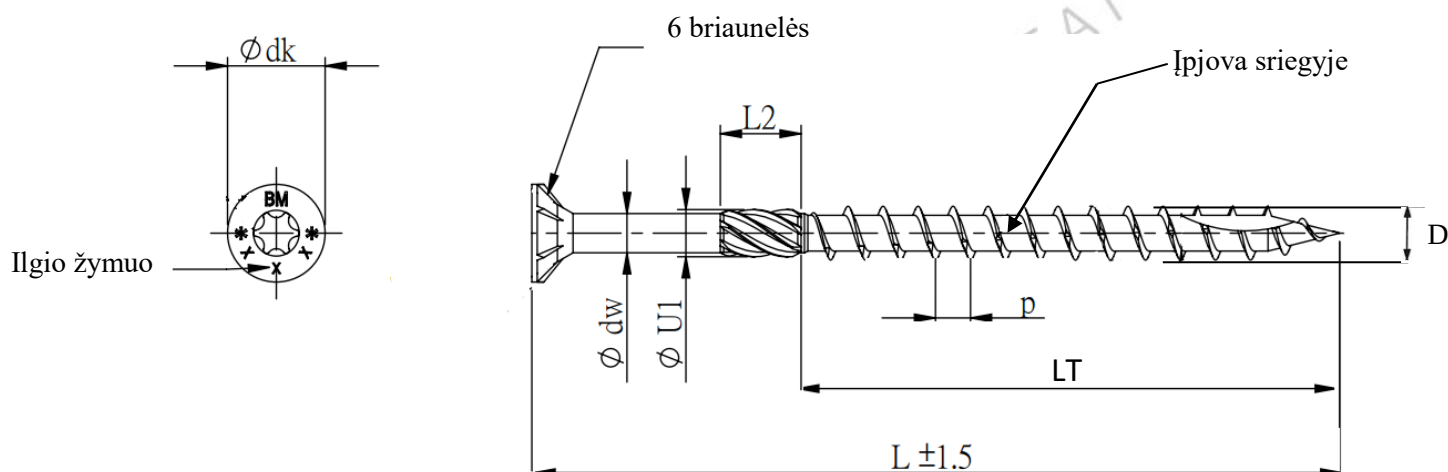

Matmenys/Dimensions, mm

D	Ø 6,0	Ø 8,0	Ø 10,0	Ø 12,0
Ø dk	12,00 +0/-1	15,00 +0/-1	18,50 +0/-1	21,50 +0/-1
Ø dw	4,25 ± 0,05	5,70 ± 0,05	7,00 ± 0,05	8,00 ± 0,05
Ø U1	5,10 ± 0,30	7,00 ± 0,30	8,50 ± 0,30	8,80 ± 0,30
p	L < 180 3,3 ± 10% L ≥ 180 4,5 ± 10%	5,20 ± 10%	5,60 ± 10%	6,00 ± 10%

L	LT	L2	LT	L2	LT	L2	LT	L2
40	32 ± 1,5		32 ± 1,5					
50	42 ± 1,5		42 ± 1,5					
60-70	52 ± 1,5		52 ± 1,5					
80-120	52 ± 1,5	12 ± 1,5	52 ± 1,5	12 ± 1,5	52 ± 1,5	12 ± 1,5		
130-200	75 ± 1,5	12 ± 1,5	80 ± 1,5	12 ± 1,5	80 ± 1,5	12 ± 1,5	80 ± 1,5	12 ± 1,5
220-300	75 ± 1,5	12 ± 1,5	80 ± 1,5	12 ± 1,5	80 ± 1,5	12 ± 1,5	80 ± 1,5	12 ± 1,5
320-440			80 ± 1,5	12 ± 1,5	80 ± 1,5	12 ± 1,5	80 ± 1,5	12 ± 1,5
460-500			80 ± 1,5	12 ± 1,5	80 ± 1,5	12 ± 1,5	120 ± 1,5	12 ± 1,5
520-600			80 ± 1,5	12 ± 1,5	80 ± 1,5	12 ± 1,5	120 ± 1,5	12 ± 1,5

D – diametras mm,
dk – galvutės skersmuo mm,
dw – kotelio storis mm,
U1 – U sriegio diametras mm
L – ilgis mm,
LT – srieginės dalies ilgis mm,
L2 – U sriegio ilgis mm,
p – sriegio žingsnis mm,

D – diameter mm
dk – head's diameter mm
dw – shank diameter mm
U1 – U thread diameter mm
L – length mm
LT – threaded part length mm
L2 – U thread length mm
p – pitch mm