


## Medvaržčiai TX, daliniu sriegiu, su įpjova

6-Lobe double flat head W/6 Nibs chipboard screws, double thread (type U+ chipboard thread +1 notch) with slot point (type 17)

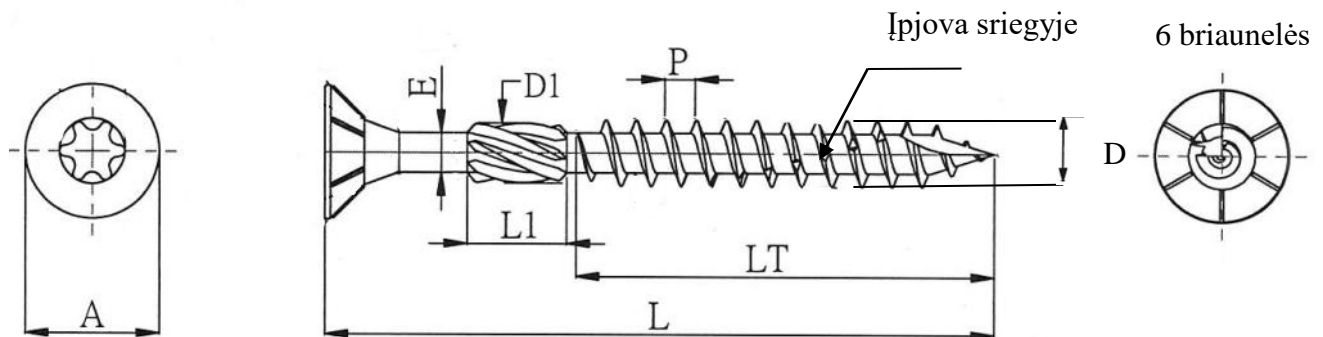

Matmenys/Dimensions

D	ø 3.5	ø 4.0	ø 4.5	ø 5.0	ø 6.0
A (ref)	7,00	8,00	9,00	10,00	12,00
E (ref)	2,5	2,85	3,15	3,45	4,25
P (ref)	1,80	2,00	2,20	2,50	3,00
L1 (ref)	4,2	4,8	6,8	8,3	8,3
D1 (ref)	3,00	3,5	3,5	4,2	5,2
Įsukimo tipas	T-15	T-20	T-20	T-25	T-30
Min. sukimo momentas (Nm)	1,96	3,24	4,31	6,18	10,81

L	LT	LT	LT	LT	LT
<b>30</b>	18 +0/-1	18 +0/-1			
<b>40</b>	24 +0/-1	24 +0/-1	24 +0/-1	24 +0/-1	
<b>45</b>	30 +0/-1	30 +0/-1	30 +0/-1	30 +0/-1	30 +0/-1
<b>50</b>	30 +0/-1	30 +0/-1	30 +0/-1	30 +0/-1	30 +0/-1
<b>60</b>		36 +0/-1	36 +0/-1	36 +0/-1	36 +0/-1
<b>70</b>		42 +0/-1	42 +0/-1	42 +0/-1	42 +0/-1
<b>80</b>			48 +0/-1	48 +0/-1	48 +0/-1
<b>90</b>				60 +0/-1	60 +0/-1
<b>100</b>				60 +0/-1	60 +0/-1
<b>120</b>				50 +0/-1	70 +0/-1
<b>130- 240</b>				70 +0/-1	70 +0/-1

D – diametras mm,  
 D1 – U sriegio diametras mm,  
 A – galvutės diametras mm,  
 E – kotelio storis mm,  
 P – sriegio žingsnis mm,  
 L1 – U sriegio ilgis mm,  
 LT – srieginės dalies ilgis mm,  
 L – visas ilgis mm,

D – diameter mm  
 D1 – U thread diameter mm  
 A – head's diameter mm  
 E – shank diameter mm  
 P – pitch mm  
 L1 – U thread length mm  
 LT – threaded part length mm  
 L – length mm