


Medvaržčiai įleidžiama PZ galvele, daliniu sriegiu

Pozi drive double flat head chipboard screws

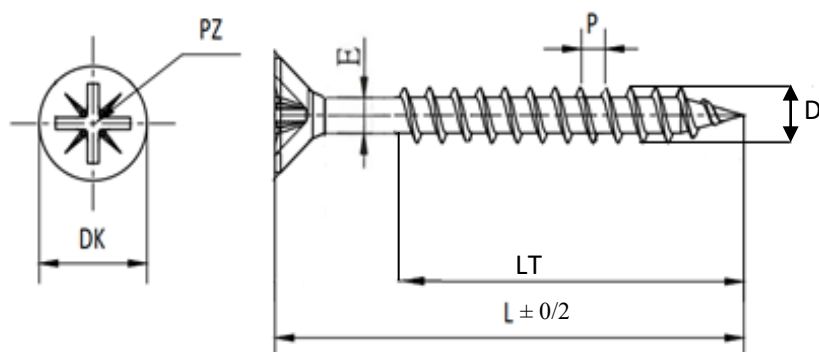

Matmenys/Dimensions mm

D	ø 3.0	ø 3.5	ø 4.0	ø 4.5	ø 5.0	ø 6.0
DK (ref)	6,00	7,00	8,00	9,00	10,00	12,00
PZ	1	2	2	2	2	3
P (± 10%)	1,35	1,60	1,80	2,00	2,20	2,60
E (ref)	2,20	2,50	2,85	3,15	3,45	4,25

L	LT					
35	21 ± 0.2	21 ± 0.2	21 ± 0.2	21 ± 0.2		
40	24 ± 0.2	24 ± 0.2	24 ± 0.2	24 ± 0.2	24 ± 0.2	24 ± 0.2
45	27 ± 0.2	27 ± 0.2	27 ± 0.2	27 ± 0.2	27 ± 0.2	27 ± 0.2
50		30 ± 0.2	30 ± 0.2	30 ± 0.2	30 ± 0.2	30 ± 0.2
60			36 ± 0.2	36 ± 0.2	36 ± 0.2	36 ± 0.2
70			42 ± 0.2	42 ± 0.2	42 ± 0.2	42 ± 0.2
80				48 ± 0.2	48 ± 0.2	48 ± 0.2
90					54 ± 0.2	54 ± 0.2
100 - 220					75 ± 0.2	75 ± 0.2

D - diametras mm,
 DK - galvutės skersmuo mm,
 PZ - įsukimo tipas, dydis
 P - sriegio žingsnis mm,
 E - kotelio skersmuo mm,
 L - bendras ilgis mm,
 LT - srieginės dalies ilgis mm,

D - diameter mm,
 DK - head's diameter mm
 PZ - drive type
 P - pitch mm
 E - shank diameter mm
 L - length mm
 LT - threaded part length mm