


Medvaržčiai fasadui Torx su bronziniu antikoroziiniu padengimu, daliniu sriegiu, su įpjova

6-Lobe double flat head W/6 Nibs screws, double thread (type U+ chipboard thread +1 notch) with slot point (type 17), Ruspert bronze

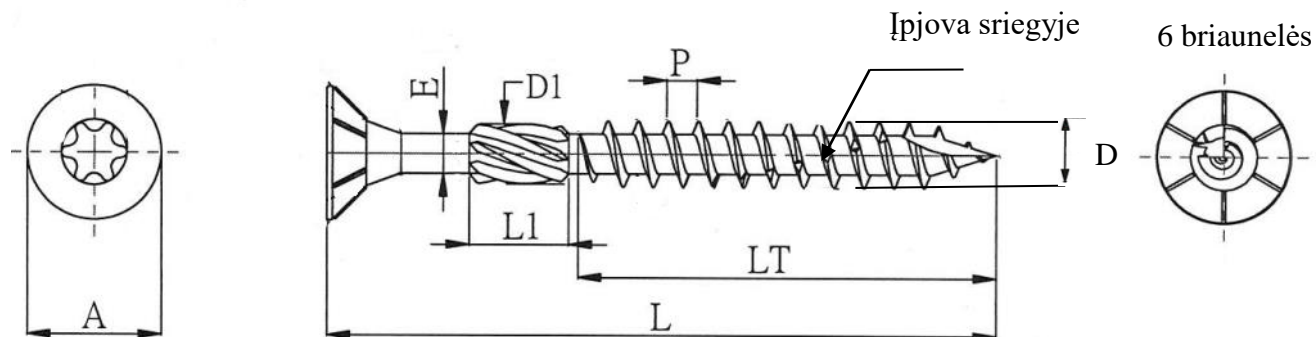

Matmenys/Dimensions

D	ø 3.5	ø 4.0	ø 4.5	ø 5.0	ø 6.0
A (ref)	7,00	8,00	9,00	10,00	12,00
E (ref)	2,5	2,85	3,15	3,45	4,25
P (ref)	1,80	2,00	2,20	2,50	3,00
L1 (ref)	4,2	4,8	6,8	8,3	8,3
D1 (ref)	3,00	3,5	3,5	4,2	5,2
Įsukimo tipas	T-15	T-20	T-20	T-25	T-30
Min. sukimo	1,96	3,24	4,31	6,18	10,81

L	LT	LT	LT	LT	LT
30	18 +0/-1	18 +0/-1			
40	24 +0/-1	24 +0/-1	24 +0/-1	24 +0/-1	
45	30 +0/-1	30 +0/-1	30 +0/-1	30 +0/-1	30 +0/-1
50	30 +0/-1	30 +0/-1	30 +0/-1	30 +0/-1	30 +0/-1
60		36 +0/-1	36 +0/-1	36 +0/-1	36 +0/-1
70		42 +0/-1	42 +0/-1	42 +0/-1	42 +0/-1
80			48 +0/-1	48 +0/-1	48 +0/-1
90				60 +0/-1	60 +0/-1
100				60 +0/-1	60 +0/-1
120				70 +0/-1	70 +0/-1
130- 240				70 +0/-1	70 +0/-1

D – diametras mm,
 A – galvutės plotis mm,
 E – kotelio skersmuo mm,
 L1 – U sriegio ilgis mm,
 D1 – U sriegio diametras mm,
 P – sriegio žingsnis mm,
 L – ilgis mm,
 LT – srieginės dalies ilgis mm,

D – diameter mm
 A – head's diameter mm
 E – shank diameter mm
 L1 – U thread length mm
 D1 – U thread diameter mm
 P – pitch mm
 L – length mm
 LT – threaded part length mm