


## Terasiniai medsraigčiai TORX, pilku antikorozininiu padengimu

6-Lobe trim head w/4 claws deck screw, coarse thread with slot point (TYPE 17)  
partial thread, ruspert gray

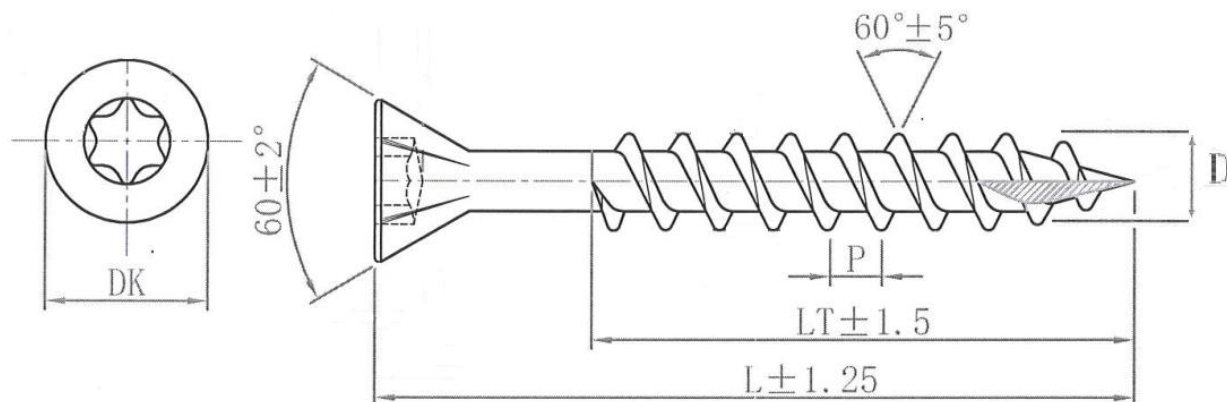

Matmenys/Dimensions, mm

D	M4.2	M4.5	M5.0
DK	5.74-6.24	6.30-6.80	6.80-7.20
P	2.82	2.82	3.50
Įsukimo tipas/Drive type	TX15	TX15	TX20

L+0/-1.25	LT+0/-1.5	LT+0/-1.5	LT+0/-1.5
45	29		
50		33	
60		39	
70			47