


Varžtai pusapvale galvele,
vidiniu šešiakampiu

pagal ISO 7380
acc. to ISO 7380

Button head screws, fully threaded

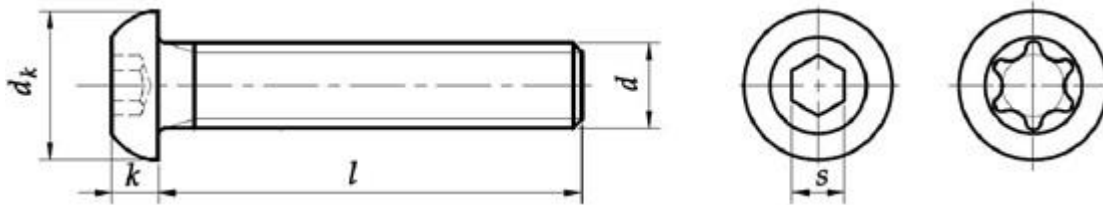

Matmenys

Dimensions

D	M3	M4	M5	M6	M8	M10	M12	M16	
P	0,5	0,7	0,8	1	1,25	1,5	1,75	2	
Dk	MAX.	5,7	7,6	9,50	10,50	14,00	17,50	21,00	28,00
	MIN.	5,4	7,24	9,14	10,07	13,57	17,07	20,48	27,48
K	MAX.	1,65	2,20	2,75	3,3	4,4	5,5	6,60	8,80
	MIN.	1,40	1,95	2,50	3,0	4,1	5,2	6,24	8,44
SNOM	2	2,5	3	4	5	6	8	10	
TX*	-	20	25	30	40	50	-	-	

P – sriegio žingsnis

* - nėra įtrauktas į standartą

P – thread pitch

* - not included in standard