


Rankoviniai ankeriai į betoną su varžtu

Anti-spin sleeve anchor for medium loads

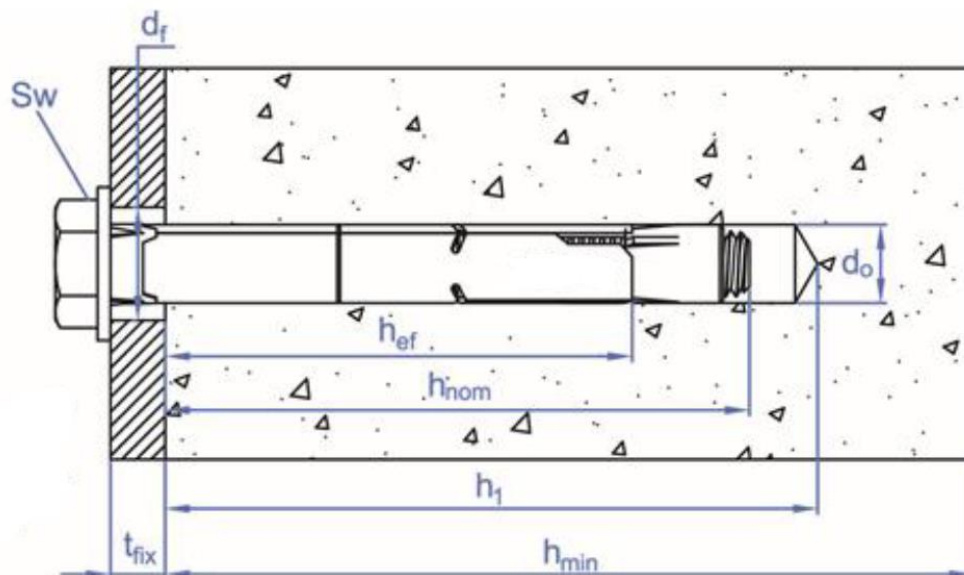

Matmenys/Dimensions

Matmenys	Drill bit diameter	Fixture clearance hole diameter	Installation torque	Total anchor length	Minimum thickness of concrete	Depth of drilled hole	Installation depth	Effective depth	Fixture thickness	Minimum allowable spacing	Minimum allowable edge distance
	Skersmuo	Tvirtinamo elemento skersmuo	Sukimo momentas	Ilgis	Mažiausias montuojamo pagrindo storis	Kokio gylis skylę reikia išgręžti	Montavimo gylis	Efektyvus montavimo gylis	Montuojamos detalės storis	Minimalus atstumas tarp ankerių	Minimalus atstumas nuo krašto
	D ₀ [mm]	D _f [mm]	T _{inst.} [Nm]	L [mm]	H _{min} [mm]	H ₁ [mm]	H _{nom} [mm]	H _{ef} [mm]	T _{fix} [mm]	S _{min} [mm]	C _{min} [mm]
6x45	ø 8	9	10	45	100	45	39	30	5	41	41
6x60				65					20		
6x45	ø 9	10		45					5		
6x60		10		60					20		
8x60	ø 10	12	20	60	100	60	51	40	5	54	54
8x80		12		80					27		
8x60	ø 11	13		60					5		
8x80		13		80					27		
10x70	ø 12	14	35	70	100	75	65	48	5	65	65
10x100		14		100					32		
10x70	ø 14	16		70					5		
10x100		16		100					32		
12x80	ø 16	18	50	80	110	80	70	55	5	74	74
12x110				110					37		
16x110	ø 20	22	140	110	145	105	92	72	15	97	97
20x130	ø 25	27	240	130	160	130		80	25	240	120